

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2003-012939

(43)Date of publication of application : 15.01.2003

(51)Int.Cl.

C08L101/00
 B29C 45/00
 C08J 5/00
 C08K 3/00
 C08K 7/00
 // B29K 9:06
 B29K 23:00
 B29K 31:00
 B29K 33:00
 B29K 55:00
 B29K 63:00
 B29K 67:00
 B29K 69:00
 B29L 24:00

BEST AVAILABLE COPY

(21)Application number : 2001-202046

(71)Applicant : TORAY IND INC

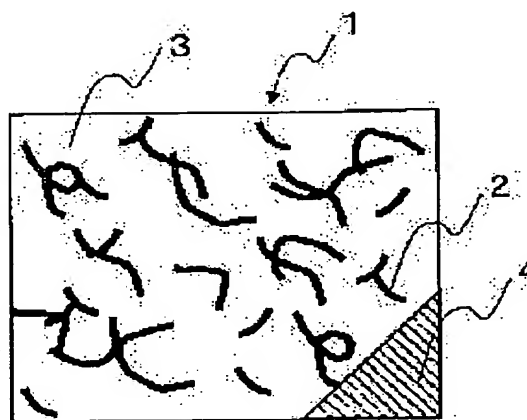
(22)Date of filing : 03.07.2001

(72)Inventor : WADAHARA EISUKE
 ISHIBASHI SOICHI
 HONMA MASATO

(54) CARBON-CONTAINING RESIN COMPOSITION, MOLDING MATERIAL AND MOLDED PRODUCT**(57)Abstract:**

PROBLEM TO BE SOLVED: To provide a carbon-containing resin composition exhibiting excellence in mechanical characteristics and molding properties and, if required, combined with excellent electroconductivity, a molding material and a molded product composed thereof.

SOLUTION: The carbon-containing resin composition comprises at least the following constituents [A], [B] and [C], where the constituent [A] is uniformly dispersed in the constituent [B] without substantially forming aggregate or entanglement, the amount of the constituents [A] and [C] being within 0.01–1.8 wt.% and within 0.1–55 wt.%, respectively, based on 100 wt.% of the composition, where the constituent [A] is a carbon nanotube having an average diameter of 1–45 nm and an average aspect ratio of at least 5, the constituent [B] is a resin, and the constituent [C] is a filler. The molding material and the molded product are obtained by processing and molding the carbon-containing resin composition.

**LÉGAL STATUS**

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office

BEST AVAILABLE COPY